


# ER10250


3.6V / 0.40Ah

Lithium Thionyl Chloride Battery



## DISCHARGE CHARACTERISTICS AT 23±2°C

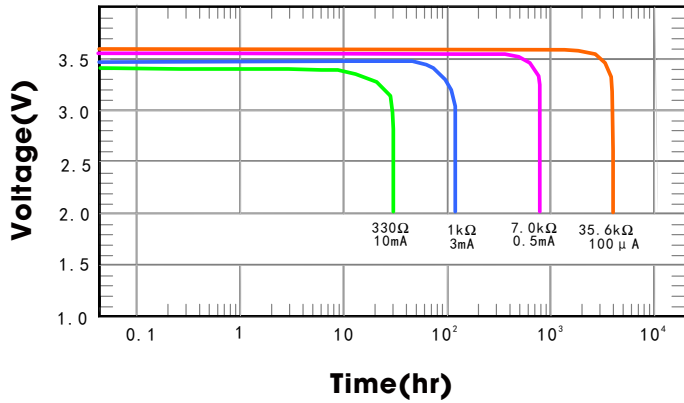

## CAPACITY VS. CURRENT

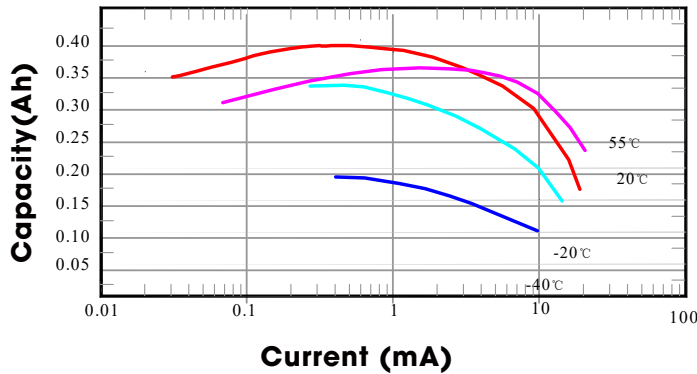

## VOLTAGE VS. TEMPERATURE

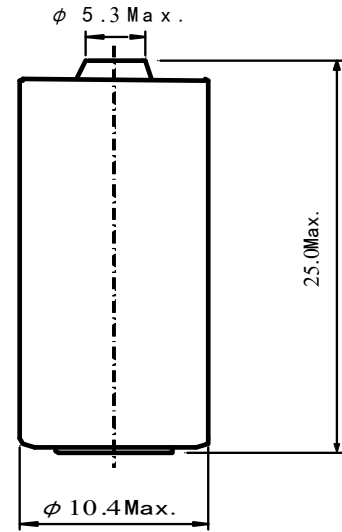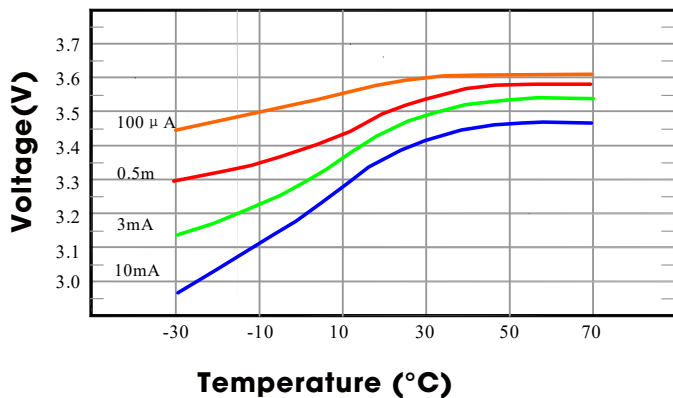

## ELECTRICAL CHARACTERISTICS:

**SPECIFICATION:** ( 23 ± 2°C )

**Nominal Capacity (0.5mA~2V):** 0.40Ah

**Rated Voltage:** 3.6V

**Max Constant Current of Discharge:** 5mA

**Max Discharge Current (Pulse):** 10mA

**Operating Temperature Range:** -55°C~85°C

**Weight ( approx ):** 4g

## S: STANDARD TERMINATION

### Notes:

Dimension:mm

Special terminations can be made as requested.

T: Solder tabs

P: Axial pins

### Important Notes:

Do not short or charge the battery.

Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.

Do not heat/use the battery beyond the permitted temperature range.



U.L. Component Recognition MH 45782