


ER341245H


3.6V / 35Ah

Lithium Thionyl Chloride Battery



DISCHARGE CHARACTERISTICS AT 23±2°C

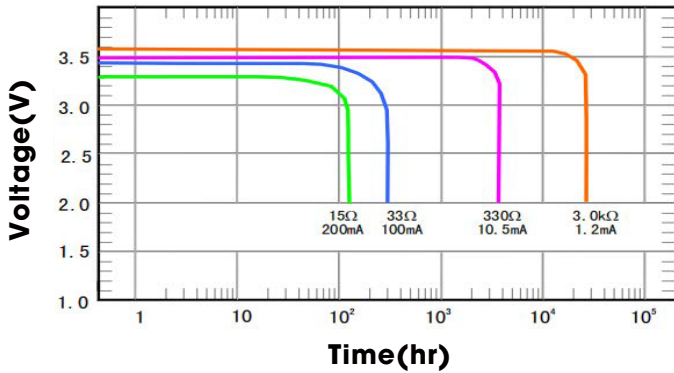

CAPACITY VS. CURRENT

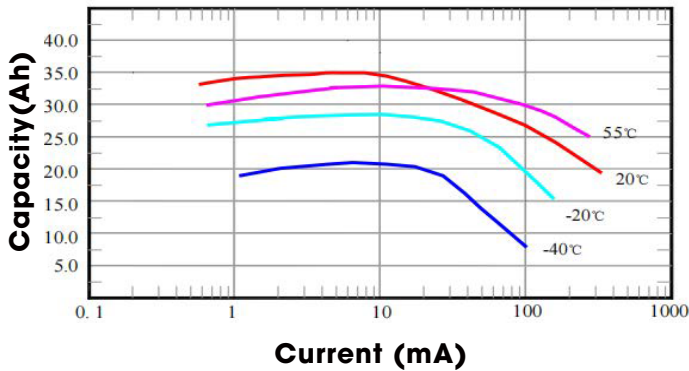

VOLTAGE VS. TEMPERATURE

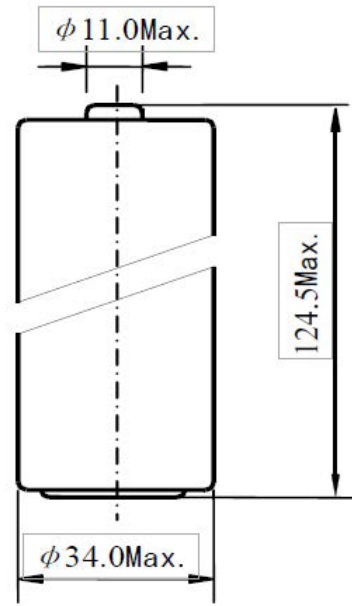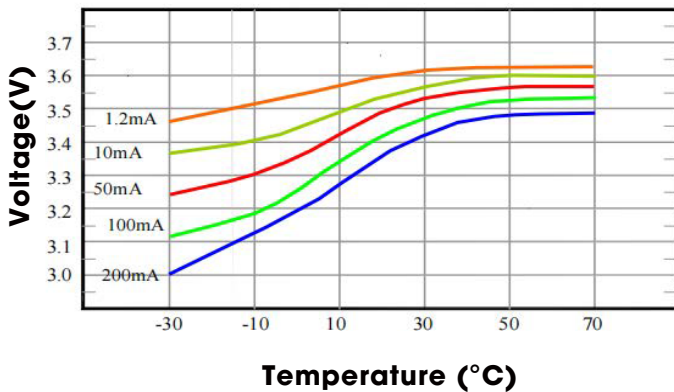

ELECTRICAL CHARACTERISTICS:

SPECIFICATION: (23 ± 2°C)

Nominal Capacity (2mA~2V): 35Ah

Rated Voltage: 3.6V

Max Constant Current of Discharge: 420mA

Max Discharge Current (Pulse): 500mA

Operating Temperature Range: -55°C~85°C

Weight (approx): 200g

S: STANDARD TERMINATION

Notes:

Dimension:mm

Special terminations can be made as requested.

T: Solder tabs

P: Axial pins

Important Notes:

Do not short or charge the battery.

Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.

Do not heat/use the battery beyond the permitted temperature range.



U.L. Component Recognition MH 45782