


ER26500M


3.6V / 6.5Ah

Lithium Thionyl Chloride Battery



DISCHARGE CHARACTERISTICS AT 23±2°C

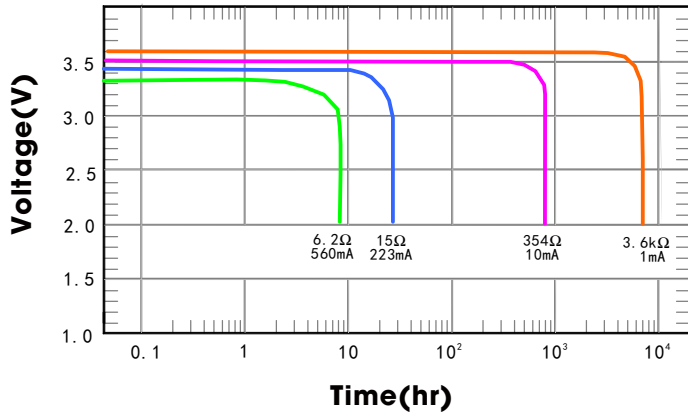

CAPACITY VS. CURRENT

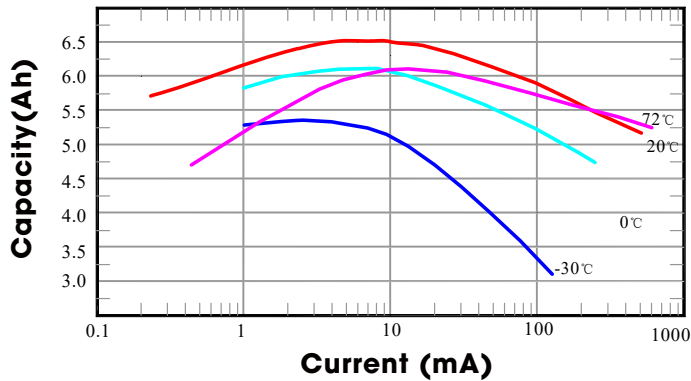

VOLTAGE VS. TEMPERATURE

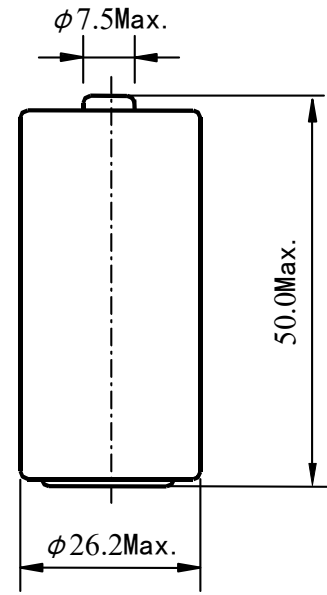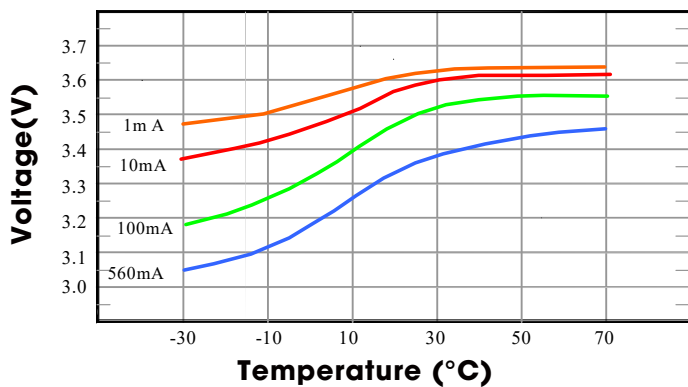

ELECTRICAL CHARACTERISTICS:

SPECIFICATION: (23 ± 2°C)

Nominal Capacity (10mA~2V): 6.5Ah

Rated Voltage: 3.6V

Max Constant Current of Discharge: 1000mA

Max Discharge Current (Pulse): 2000mA

Operating Temperature Range: -55°C~85°C

Weight (approx): 53g

S: STANDARD TERMINATION

Notes:

- Dimension:mm
- Special terminations can be made as requested.
- T: Solder tabs
- P: Axial pins

Important Notes:

- Do not short or charge the battery.
- Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.
- Do not heat/use the battery beyond the permitted temperature range.



U.L. Component Recognition MH 45782